

PB SERIES

Exit switch (Ring illuminated) (Dual color LED)



PB-1AF-GRN

120Lx70Wx4.5T mm



PB-2AF-BRN

120Lx42Wx4.5T mm



GRN
(LED-Green)



BRN
(LED-Blue)

DUAL COLOR LED: Input 12VDC or 24VDC

Order Information

- ◎ **Face plate:** Aluminum alloy 6063T5.
 - Hair-line surface treatment.
 - Anodized Aluminum process.
- ◎ **Push button:** Stainless steel.
 - Surface polished.
- ◎ **features :**
 - Operating type : Momentary.
 - Actuator : Diameter = $\varnothing 15$ mm
 - Water proof, most likely IP65.
 - Replaceable switch when damaged.
- ◎ **In/out door use.**

Model	Normal	Press	Note	Model	Normal	Press	Note
PB-□AF-GRN-12V	Green	Red	(Default)	PB-□AF-GRN-24V	Green	Red	(Made to order)
PB-□AF-BRN-12V	Blue	Red	(Default)	PB-□AF-BRN-24V	Blue	Red	(Made to order)
PB-□AF-RGN-12V	Red	Green	(Made to order)	PB-□AF-RGN-24V	Red	Green	(Made to order)
PB-□AF-RBN-12V	Red	Blue	(Made to order)	PB-□AF-RBN-24V	Red	Blue	(Made to order)


SPEC Specification (Micro Switch)

Specifications :


- Rating : 125VAC 3A/ 250VAC 1.5A
- Circuit Arrangement : SPDT (Single pole double throw)
- Mechanical Service Life : Min. 1,000,000 operations.
- Service Life : Min. 10,000 operations.
- Operating Temperature : -25°C ~ 65°C
- Storage Humidity : Max. 85% R.H.
- Safety Certificate :

Wiring diagram :

- DUAL COLOR LED: Input 12VDC or 24VDC

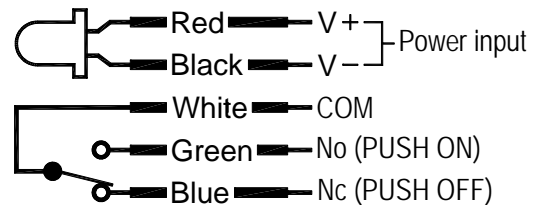

Dimensions

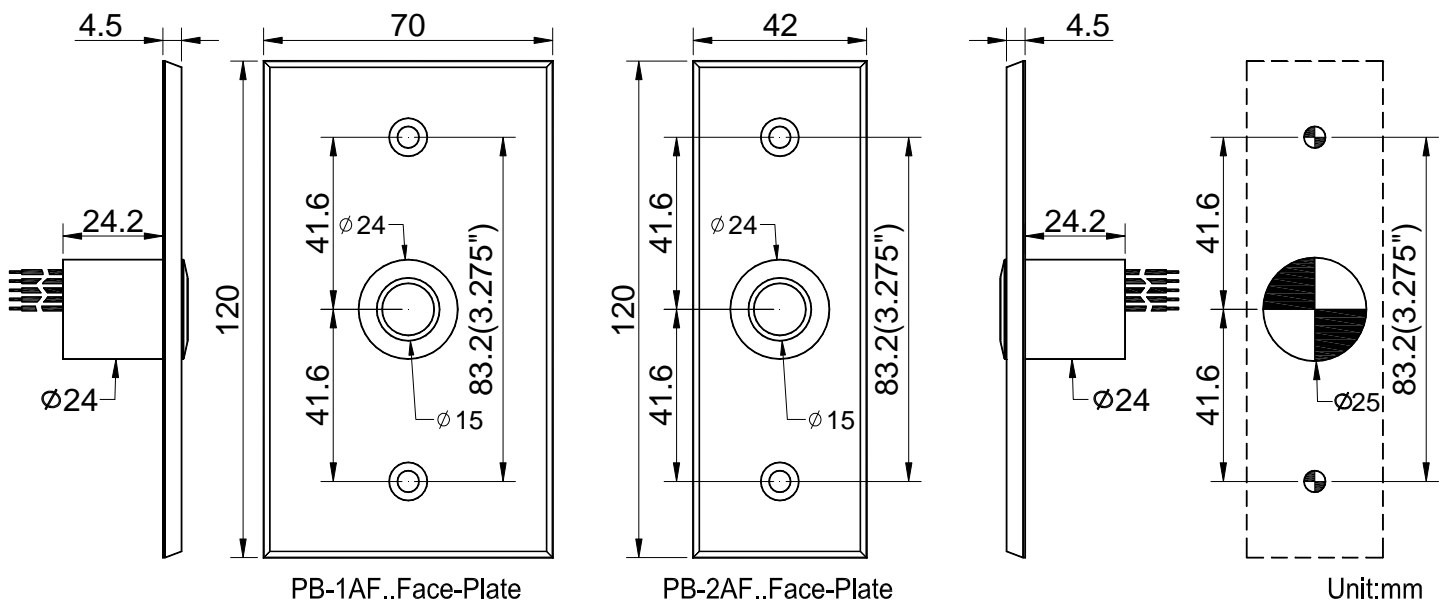

RoHS

PB-12AFGB. 02-20190320EN



PB-1AF-GRN

120Lx70Wx4.5T mm

DUAL COLOR LED: Input 12VDC or 24VDC



GRN
(LED-Green)



BRN
(LED-Blue)

Order Information

- ⊙ **Face plate:** Aluminum alloy 6063T5.
 - Hair-line surface treatment.
 - Anodized Aluminum process.
- ⊙ **Push button:** Stainless steel.
 - Surface polished.
- ⊙ **features :**
 - Operating type : Momentary.
 - Actuator : Diameter = \varnothing 15mm
 - Water proof, most likely IP65.
 - Replaceable switch when damaged.
- ⊙ **In/out door use.**

Model	Normal	Press	Note	Model	Normal	Press	Note
PB-1AF-GRN-12V	Green	Red	(Default)	PB-1AF-GRN-24V	Green	Red	(Made to order)
PB-1AF-BRN-12V	Blue	Red	(Default)	PB-1AF-BRN-24V	Blue	Red	(Made to order)
PB-1AF-RGN-12V	Red	Green	(Made to order)	PB-1AF-RGN-24V	Red	Green	(Made to order)
PB-1AF-RBN-12V	Red	Blue	(Made to order)	PB-1AF-RBN-24V	Red	Blue	(Made to order)


SPEC Specification (Micro Switch)

Specifications :


- Rating : 125VAC 3A/ 250VAC 1.5A
- Circuit Arrangement : SPDT (Single pole double throw)
- Mechanical Service Life : Min. 1,000,000 operations.
- Service Life : Min. 10,000 operations.
- Operating Temperature : -25°C ~ 65°C
- Storage Humidity : Max. 85% R.H.
- Safety Certificate :

Wiring diagram :



- DUAL COLOR LED: Input 12VDC or 24VDC

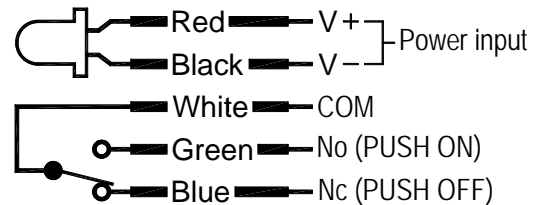

外型尺寸

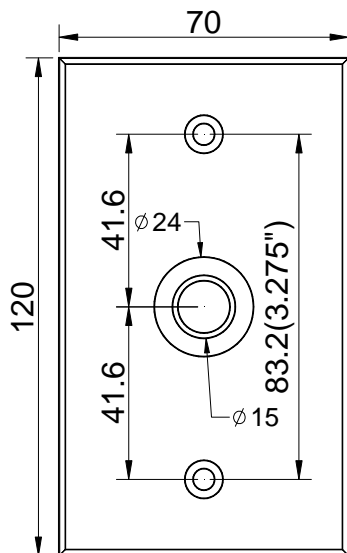

PB-1AF..Face-Plate

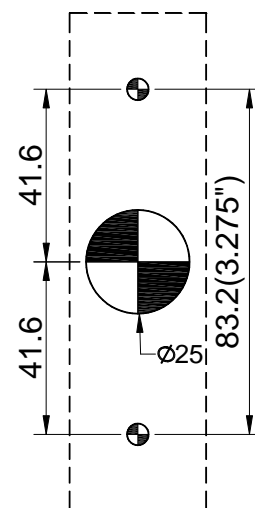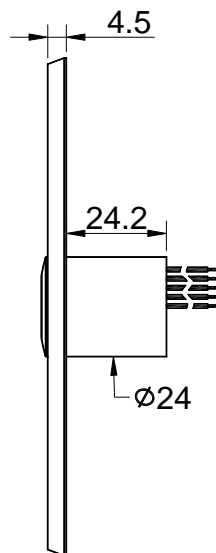

Unit:mm

RoHS



PB-1AF-BRN

120Lx70Wx4.5T mm

DUAL COLOR LED: Input 12VDC or 24VDC



GRN
(LED-Green)



BRN
(LED-Blue)

Order Information

- ⊙ **Face plate:** Aluminum alloy 6063T5.
 - Hair-line surface treatment.
 - Anodized Aluminum process.
- ⊙ **Push button:** Stainless steel.
 - Surface polished.
- ⊙ **features :**
 - Operating type : Momentary.
 - Actuator : Diameter = $\varnothing 15\text{mm}$
 - Water proof, most likely IP65.
 - Replaceable switch when damaged.
- ⊙ **In/out door use.**

Model	Normal	Press	Note	Model	Normal	Press	Note
PB-1AF-GRN-12V	Green	Red	(Default)	PB-1AF-GRN-24V	Green	Red	(Made to order)
PB-1AF-BRN-12V	Blue	Red	(Default)	PB-1AF-BRN-24V	Blue	Red	(Made to order)
PB-1AF-RGN-12V	Red	Green	(Made to order)	PB-1AF-RGN-24V	Red	Green	(Made to order)
PB-1AF-RBN-12V	Red	Blue	(Made to order)	PB-1AF-RBN-24V	Red	Blue	(Made to order)


SPEC Specification (Micro Switch)

Specifications :


- Rating : 125VAC 3A/ 250VAC 1.5A
- Circuit Arrangement : SPDT (Single pole double throw)
- Mechanical Service Life : Min. 1,000,000 operations.
- Service Life : Min. 10,000 operations.
- Operating Temperature : $-25^{\circ}\text{C} \sim 65^{\circ}\text{C}$
- Storage Humidity : Max. 85% R.H.
- Safety Certificate :

Wiring diagram :

- DUAL COLOR LED: Input 12VDC or 24VDC

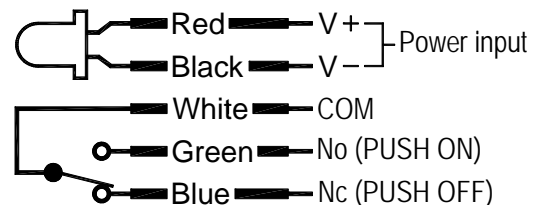

外型尺寸

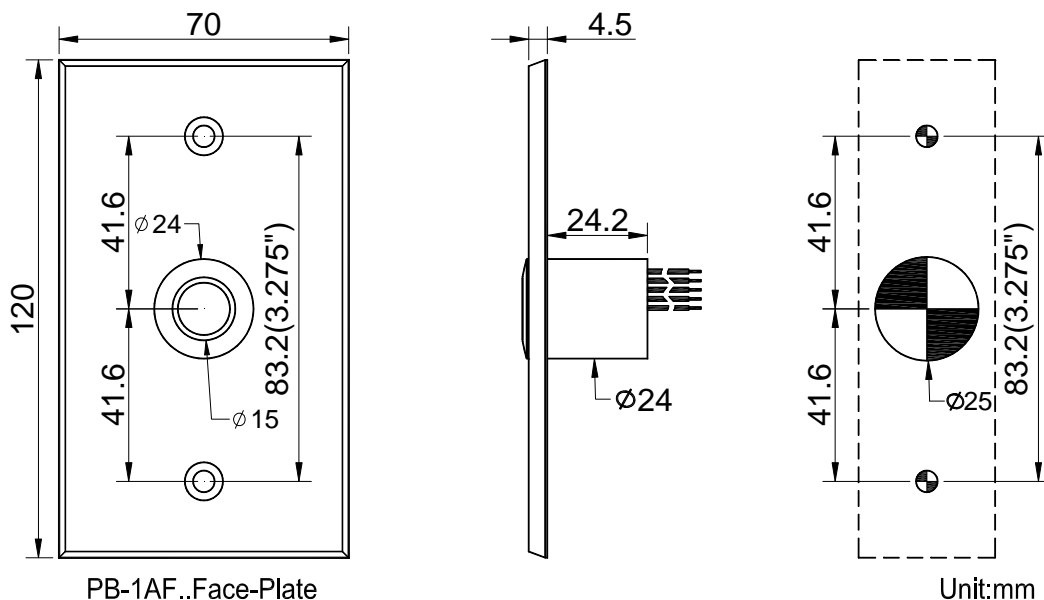

PB-1AF..Face-Plate

Unit:mm

RoHS



PB-2AF-GRN

120Lx42Wx4.5T mm

DUAL COLOR LED: Input 12VDC or 24VDC



Order Information

- ◎ **Face plate:** Aluminum alloy 6063T5.
 - Hair-line surface treatment.
 - Anodized Aluminum process.
- ◎ **Push button:** Stainless steel.
 - Surface polished.
- ◎ **features :**
 - Operating type : Momentary.
 - Actuator : Diameter = $\varnothing 15$ mm
 - Water proof, most likely IP65.
 - Replaceable switch when damaged.
- ◎ **In/out door use.**

Model	Normal	Press	Note	Model	Normal	Press	Note
PB-2AF-GRN-12V	Green	Red	(Default)	PB-2AF-GRN-24V	Green	Red	(Made to order)
PB-2AF-BRN-12V	Blue	Red	(Default)	PB-2AF-BRN-24V	Blue	Red	(Made to order)
PB-2AF-RGN-12V	Red	Green	(Made to order)	PB-2AF-RGN-24V	Red	Green	(Made to order)
PB-2AF-RBN-12V	Red	Blue	(Made to order)	PB-2AF-RBN-24V	Red	Blue	(Made to order)


SPEC Specification (Micro Switch)

Specifications :


- Rating : 125VAC 3A/ 250VAC 1.5A
- Circuit Arrangement : SPDT (Single pole double throw)
- Mechanical Service Life : Min. 1,000,000 operations.
- Service Life : Min. 10,000 operations.
- Operating Temperature : -25°C ~ 65°C
- Storage Humidity : Max. 85% R.H.
- Safety Certificate :

Wiring diagram :



- DUAL COLOR LED: Input 12VDC or 24VDC

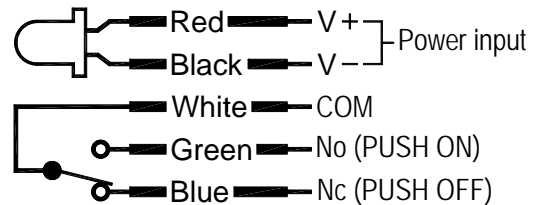

外型尺寸

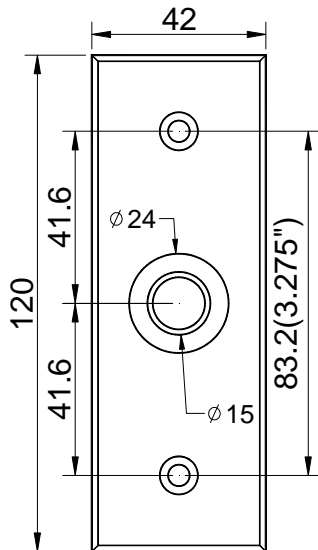

PB-2AF..Face-Plate

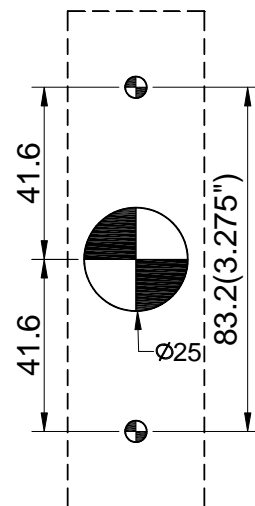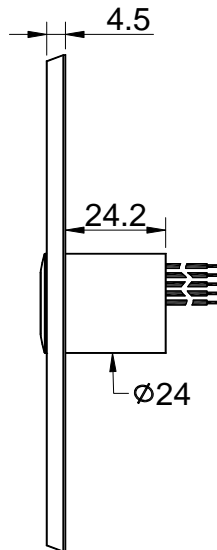

Unit:mm



PB-2AF-BRN

120Lx42Wx4.5T mm

DUAL COLOR LED: Input 12VDC or 24VDC



Order Information

- ◎ **Face plate:** Aluminum alloy 6063T5.
 - Hair-line surface treatment.
 - Anodized Aluminum process.
- ◎ **Push button:** Stainless steel.
 - Surface polished.
- ◎ **features :**
 - Operating type : Momentary.
 - Actuator : Diameter = \varnothing 15mm
 - Water proof, most likely IP65.
 - Replaceable switch when damaged.
- ◎ **In/out door use.**

Model	Normal	Press	Note	Model	Normal	Press	Note
PB-2AF-GRN-12V	Green	Red	(Default)	PB-2AF-GRN-24V	Green	Red	(Made to order)
PB-2AF-BRN-12V	Blue	Red	(Default)	PB-2AF-BRN-24V	Blue	Red	(Made to order)
PB-2AF-RGN-12V	Red	Green	(Made to order)	PB-2AF-RGN-24V	Red	Green	(Made to order)
PB-2AF-RBN-12V	Red	Blue	(Made to order)	PB-2AF-RBN-24V	Red	Blue	(Made to order)


SPEC Specification (Micro Switch)

Specifications :


- Rating : 125VAC 3A/ 250VAC 1.5A
- Circuit Arrangement : SPDT (Single pole double throw)
- Mechanical Service Life : Min. 1,000,000 operations.
- Service Life : Min. 10,000 operations.
- Operating Temperature : -25°C ~ 65°C
- Storage Humidity : Max. 85% R.H.
- Safety Certificate :

Wiring diagram :



- DUAL COLOR LED: Input 12VDC or 24VDC

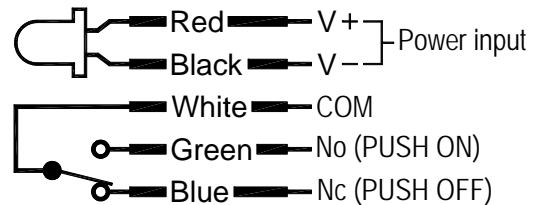

外型尺寸

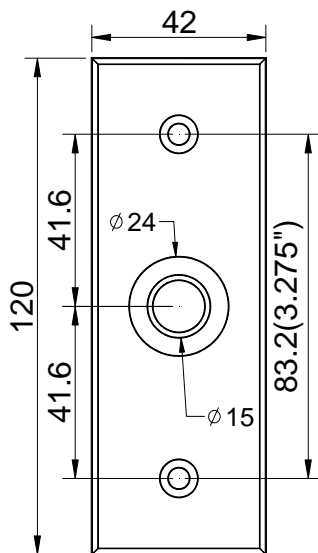

PB-2AF..Face-Plate

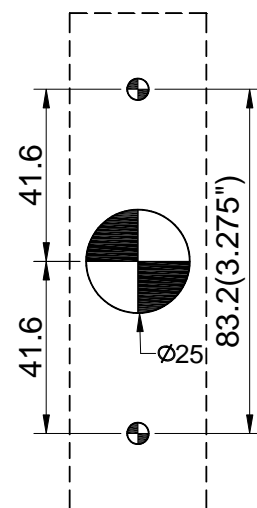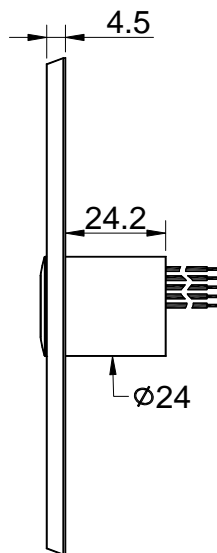

Unit:mm