



PB-1AR-N5N
120Lx70Wx4.5Tmm

PB-2AR-N5N
120Lx42Wx4.5Tmm

Order Information


- ◎ **Face plate:** Aluminum alloy 6063T5.
 - Hair-line surface treatment.
 - Anodized Aluminum process.
- ◎ **Push button:** Stainless steel.
 - Surface polished.
- ◎ **features :**
 - Operating type : Momentary.
 - Actuator : Diameter = $\varnothing 15\text{mm}$
 - Water proof, most likely IP65.
 - Replaceable switch when damaged.
- ◎ **In/out door use.**

SPEC Specification (Micro Switch)


Specifications :

- Rating : 5A 125/250VAC
- Circuit Arrangement : SPDT (Single pole double throw)
- Mechanical Service Life : Min. 1,000,000 operations.
- Service Life : Min. 10,000 operations.
- Operating Temperature : $-25^{\circ}\text{C} \sim 85^{\circ}\text{C}$
- Storage Humidity : Max. 85% R.H.
- Safety Certificate : **UL** **CE** **CQC**

Wiring diagram :

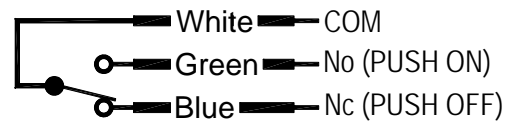

Dimensions

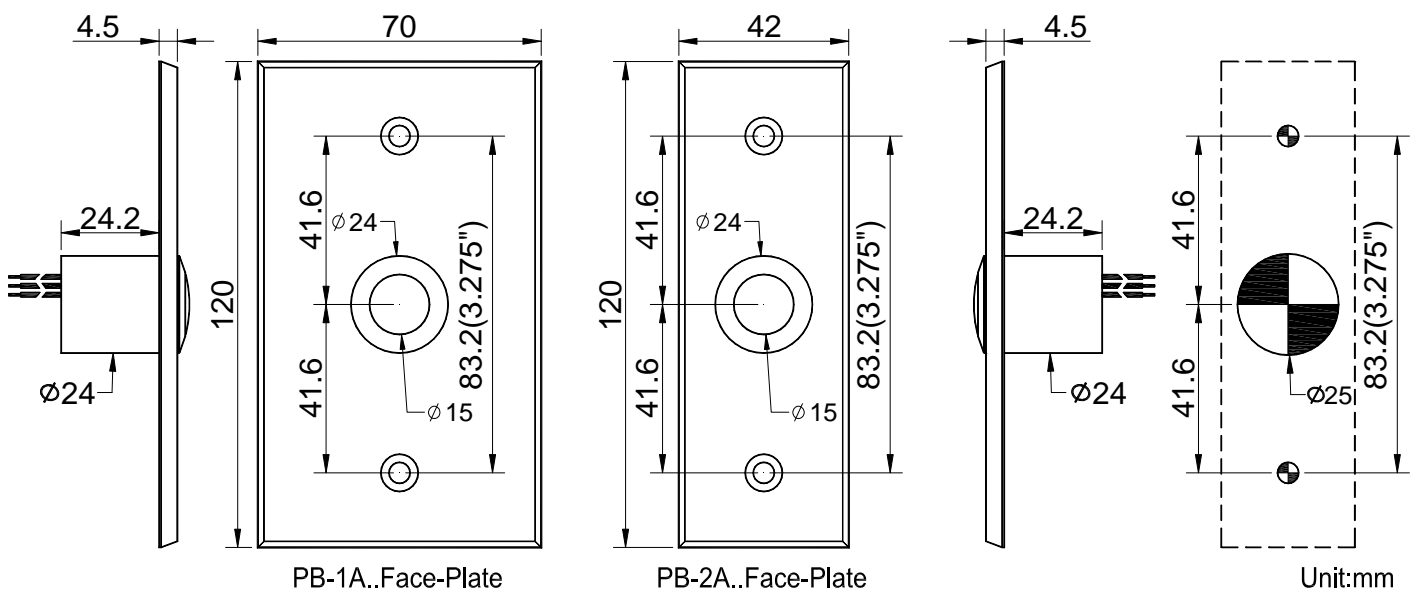



PB-1AR-N5N
120Lx70Wx4.5Tmm

Order Information


- ◎ **Face plate:** Aluminum alloy 6063T5.
 - Hair-line surface treatment.
 - Anodized Aluminum process.
- ◎ **Push button:** Stainless steel.
 - Surface polished.
- ◎ **features :**
 - Operating type : Momentary.
 - Actuator : Diameter = \varnothing 15mm
 - Water proof, most likely IP65.
 - Replaceable switch when damaged.
- ◎ **In/out door use.**

SPEC Specification (Micro Switch)


Specifications :

- Rating : 5A 125/250VAC
- Circuit Arrangement : SPDT (Single pole double throw)
- Mechanical Service Life : Min. 1,000,000 operations.
- Service Life : Min. 10,000 operations.
- Operating Temperature : $-25^{\circ}\text{C} \sim 85^{\circ}\text{C}$
- Storage Humidity : Max. 85% R.H.
- Safety Certificate : **UL** **CE** **CQC**



Wiring diagram :

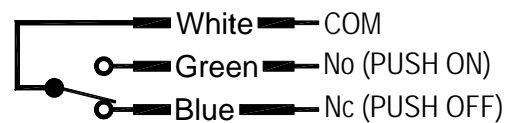

Dimensions

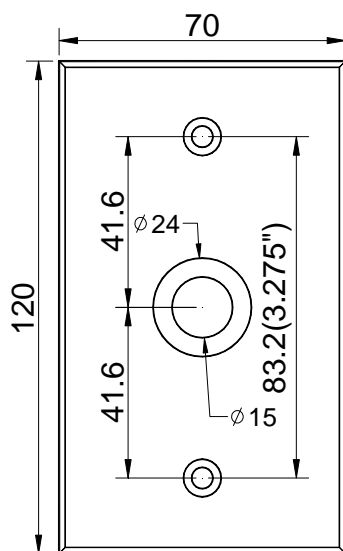

PB-1A..Face-Plate

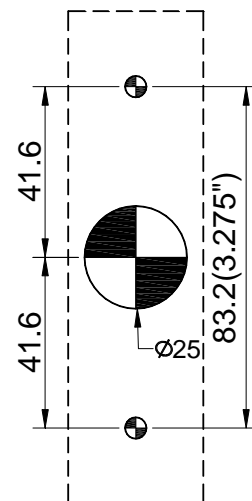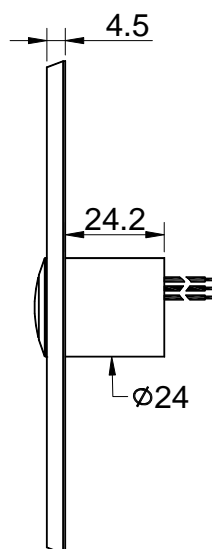

Unit:mm



PB-1AR-N5W / PB-1AR-N5W -L



PB19RSNW-O (Momentary)



PB19RSNW-L (Self-lock)



Order Information


- ◎ **Face plate:** Aluminum alloy 6063T5.
 - Hair-line surface treatment.
 - Anodized Aluminum process.
 - 120L x 70W x 4.5T mm
- ◎ **Push button:** Stainless steel (Natural)
- ◎ **Operating type :**
 - PB-1AR-N5W : PB19RSNW-O (Momentary)
 - PB-1AR-N5W -L : PB19RSNW-L (Self-lock)
- ◎ **features :**
 - Actuator : Diameter = \varnothing 15mm
 - Water proof : IP67.
 - Replaceable switch when damaged.
- ◎ **In/out door use.**

SPEC Specification (Micro Switch)


Specifications :

- Rating : 1th 5A/250VAC resistive load 3A/250VAC
- Contact Resistance : 50 m Ω max. @ 1A 12VDC (initial value)
- Circuit Arrangement : SPDT (Single pole double throw)
- Mechanical Life : Momentary 1,000,000 cycles
Self-lock 500,000 cycles
- Electrical Life : 50,000 make-and-break cycles at full load
- Operating Temperature : -20 $^{\circ}$ C ~ 55 $^{\circ}$ C
- Ingress protection : IP67, IK10 (Stainless)

Wiring diagram :

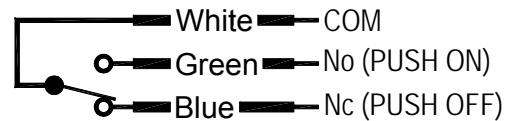

Dimensions

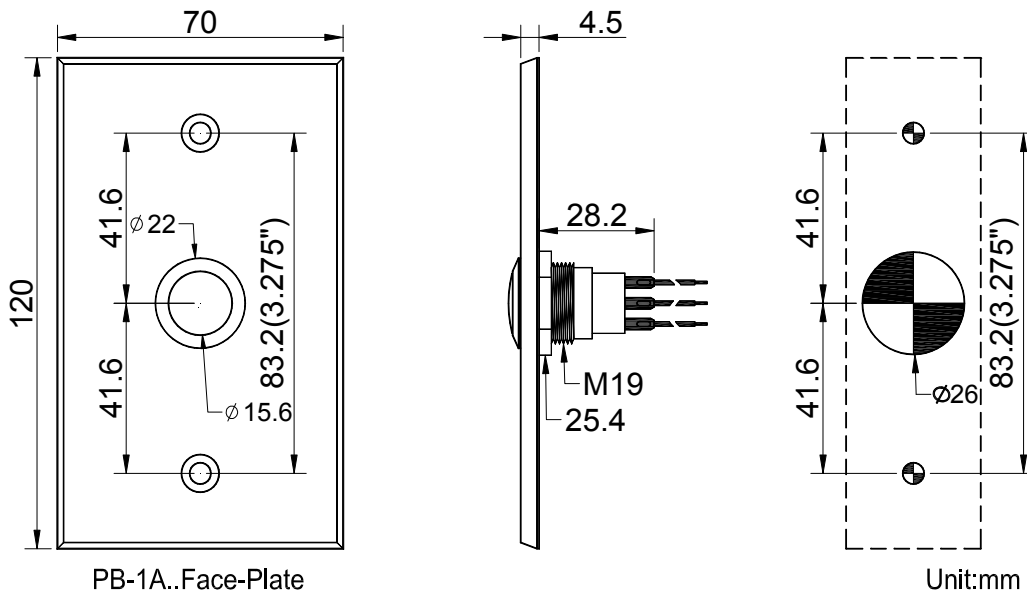



PB-1AR-N5N
120Lx42Wx4.5Tmm

Order Information


- ◎ **Face plate:** Aluminum alloy 6063T5.
 - Hair-line surface treatment.
 - Anodized Aluminum process.
- ◎ **Push button:** Stainless steel.
 - Surface polished.
- ◎ **features :**
 - Operating type : Momenray.
 - Actuator : Diameter = \varnothing 15mm
 - Water proof, most likely IP65.
 - Replaceable switch when damaged.
- ◎ **In/out door use.**

SPEC Specification (Micro Switch)


Specifications :

- Rating : 5A 125/250VAC
- Circuit Arrangement : SPDT (Single pole double throw)
- Mechanical Service Life : Min. 1,000,000 operations.
- Service Life : Min. 10,000 operations.
- Operating Temperature : $-25^{\circ}\text{C} \sim 85^{\circ}\text{C}$
- Storage Humidity : Max. 85% R.H.
- Safety Certificate : **UL** **CE** **CQC**



Wiring diagram :

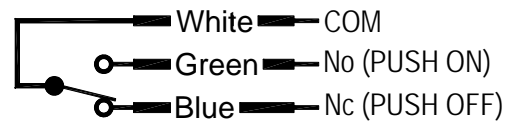

Dimensions

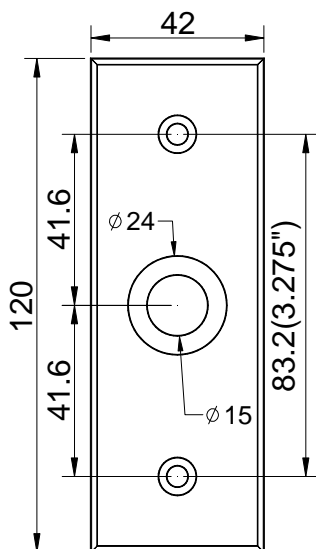

PB-2A..Face-Plate

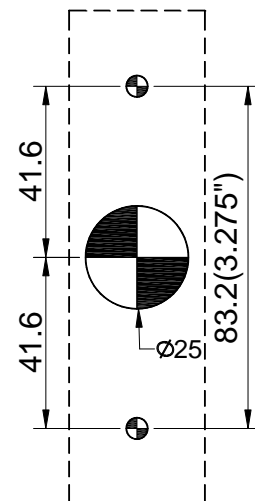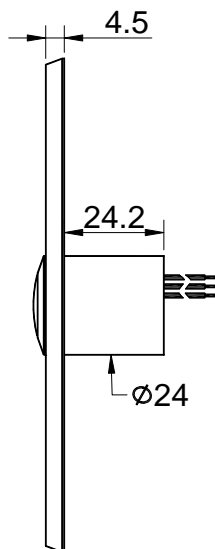

Unit:mm