

# ML300H SERIES

Fail-Safe / Power to lock

# ELECTRO MAGNETIC LOCK\_300P


(Surface Mounted)




ML300H



- Magnet(ML300H) : 166L\*38.6W\*21.5Dmm
- Armature Plate : 130L\*21W\*8T mm. .

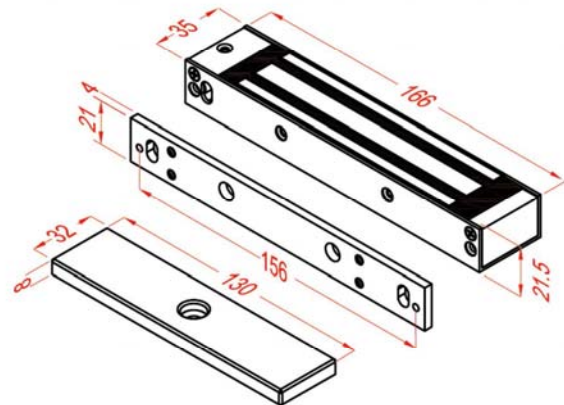

## ▼ ORDERING INFORMATION

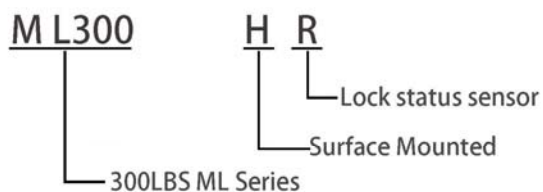

EXAMPLE :

- ML300H : Maglock 300P, surface mounted
- ML300HR : Maglock 300P, surface mounted W/Lock status sensor


## ▼ SPECIFICATION

- Voltage : 12V/24V (Selectable)
- Current Draw : 360mA/12V , 180mA /24V
- Holding Force : about 300LBS
- Built-in voltage spike suppressor
- Anodized aluminum housing
- Special Finish : Zinc (on the magnet & armature plate )

## ▼ APPLICATION

- Horizontal or vertical installation
- Suitable for in-swing / out-swing/sliding doors, cabinets, drawers, etc.

- Magnet(ML300HR) : 180L\*38.6W\*21.5Dmm

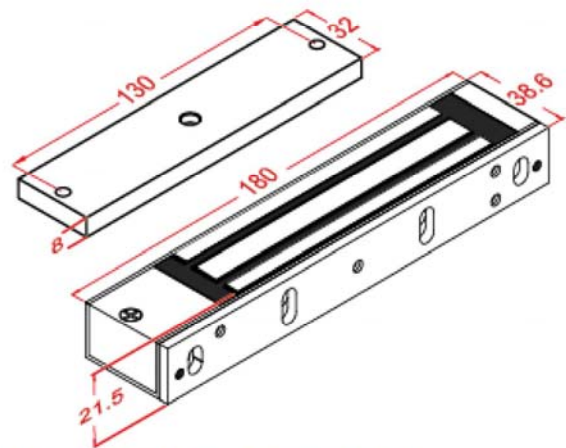

## ▼ BRACKETS INSTALLATION



B1021 - Adjustable L Bracket



B1022 - L&Z Bracket



U-130 Bracket



B0022 - Armature Plate Housing



B1004 / B1005

SIGNALING



# ML300 SERIES


Fail-Safe / Power to lock

# ELECTRO MAGNETIC LOCK\_300P


(Mortice Mounted)



- Magnet : 202L\*34.5W\*21.5D mm
- Armature Plate : 130L\*32W\*8T mm

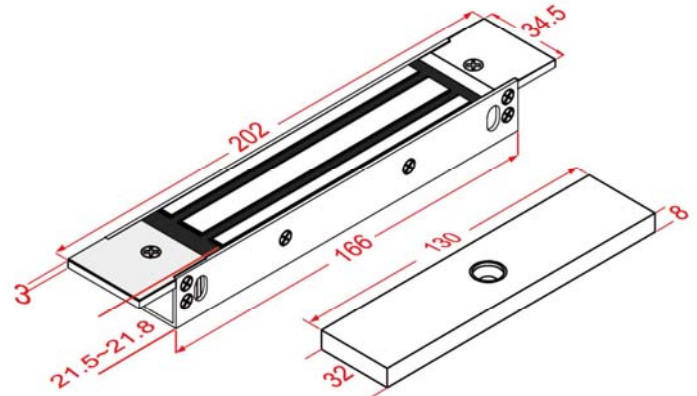

## ▼ ORDERING INFORMATION

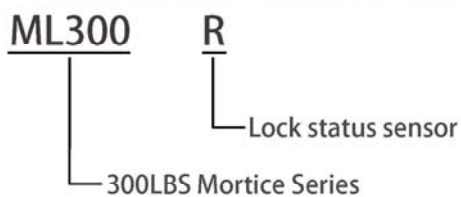

EXAMPLE :


- ML300 : Maglock 300P Mortice mounted, Basic
- ML300R : Maglock 300P, Mortice mounted, W/Lock status sensor

## ▼ SPECIFICATION

- Voltage : 12V/24VDC (Selectable)
- Current Draw : 360mA/12V , 180mA /24V
- Holding Force : about 300 LBS
- Built-in voltage spike suppressor
- Special Finish : Zinc  
(on the magnet & armature plate)
- Anodized Aluminum housing

## ▼ APPLICATION

- Horizontal or vertical installation
- Suitable for in-swing/out-swing/sliding doors , cabinets , drawers, etc.

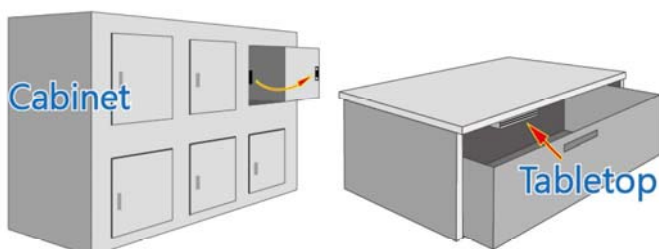


## ▼ BRACKETS INSTALLATION



B0022 -  
Armature Plate Housing



B1022 - L&Z Bracket

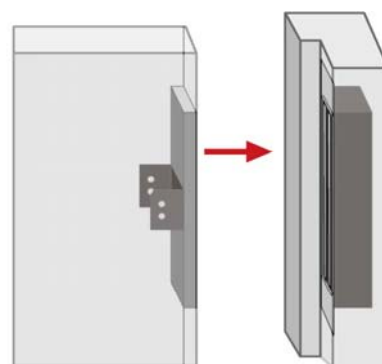

Mortice Mounted

