

MLM01 SERIES


Fail-Safe / Power to lock

SHEAR LOCK_Mortise Mounted
(ELECTRO MAGNETIC LOCK_1200P)




MLM01


- Magnet : 270L*35W*30D mm

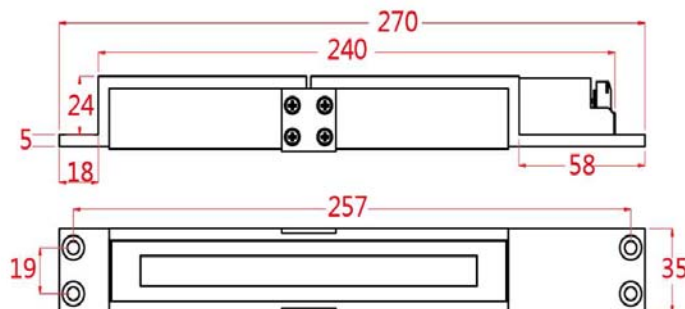

- Armature Plate : 245L*35W*30D mm

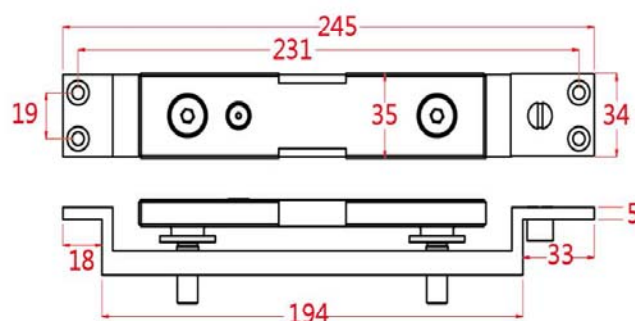

▼ ORDERING INFORMATION



EXAMPLE :

- MLM01 : Magnetic shear lock 1200P

▼ SPECIFICATION

- Voltage : 12V/24VDC (Selectable)
- Current Draw : 1.6A/12VDC , 0.9A/24VD
- Holding Current : 0.5A/12VDC , 0.3A/24VDC
- Holding Force : about 1200LBS
- Signal : Lock status sensor (Hall), Timer
- Special Finish : Zinc
(on the magnet & armature plate)
- Black-Painted brackets
- Built-in voltage spike suppressor


▼ SPECIAL FEATURE

- Adjustable door status position for improved security



▼ APPLICATION

- Suitable for single and double action door

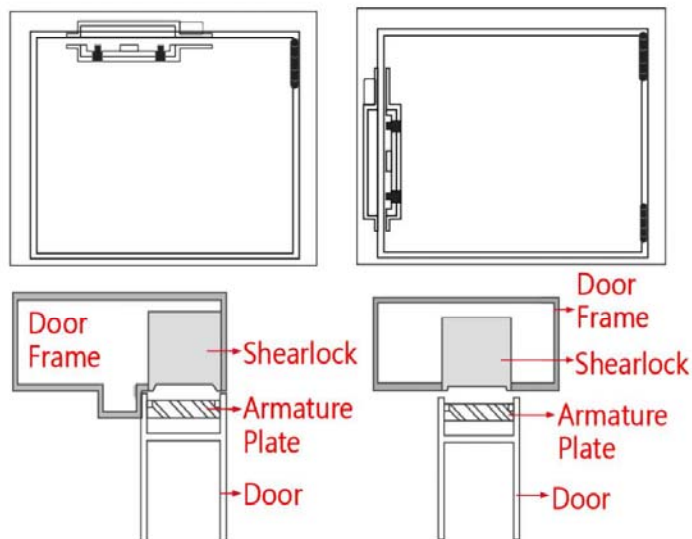

- In-swing/Out-swing door • Double action door