

ML200 SERIES

Fail-Safe / Power to lock

ELECTRIC BOLT LOCKS




MLR200SLD




ML200SLD

- ML200 : 200L*34W*43H

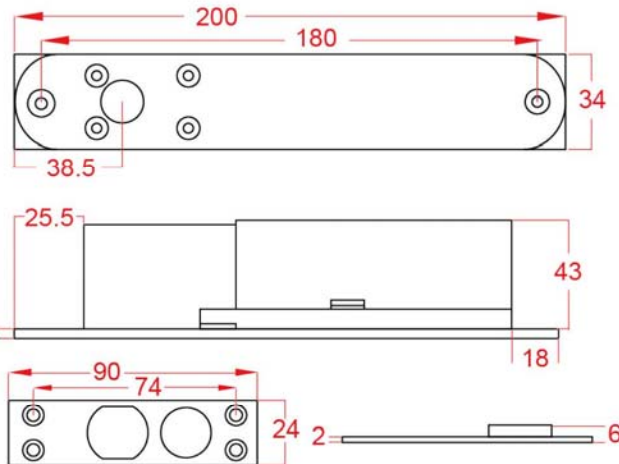

▼ ORDERING INFORMATION

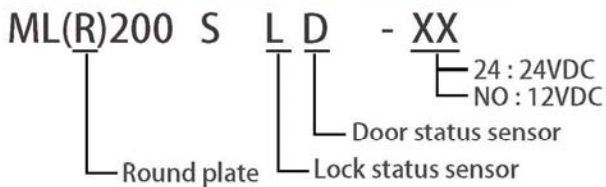

EXAMPLE :

- ML200SLD : With lock and door status sensor
- MLR200SLD : Round plate, with door and lock status sensor
- Round plate type : easy to make appropriate installation holes

▼ SPECIFICATION

- Suitable for double swing door
- Fail-safe : Locked when energized
- With lock and Door status sensor
- Built-in voltage spike suppressor
- Face Plate Material : Aluminum
- Cover Plate : Stainless steel
- Weight : 0.9KG
- Use jumper to select auto-lock time delay (0 , 2.5 , 5 sec.)
- Voltage : 12VDC or 24VDC (option)
- Current Draw : Pull-in : 1A / 12VDC
Holding : 0.3A / 12VDC

▼ INSTALLATION

- Suitable for glass door or surface mount installation



▼ BRACKETS INSTALLATION



UG202



UG200



U-200 / UG201



